

## Instruction Guide

# FIREPROOF CEILING MOUNT PIR TIMER

## 374B-1PFC

3 wire

The **Ceiling Mount PIR Timer** (3 wire) is part of the Elkay family of switches, timers and detectors which save energy and increase convenience in and around your home, garden, or premises.

### Rating at 240V ac 50Hz

- All load types 10A
- Time Delay: 2min - 1 hour
- Fireproof for 60 minutes control
- Manual Lux Sensor for daylight control
- Sensitivity Control

### Installation Instructions for Single Use IMPORTANT

#### Do not power up until instructed.

1. For flush mounting cut a 77.1mm hole to install into ceiling, attach cables and use cover cap and fixings supplied.
2. Select dip switch position for time delay required (See diagram 2).
3. Rotate lux level adjustment to the + for initialisation.
4. Connect live in, switch live out and neutral connection as per wiring colours overleaf to load or appliance.
5. Apply mains power to unit.
6. Adjust lux level to the desired setting.
7. The PIR will flash for 2-3 mins; this is the initialisation time, and the product will not work until this is complete.



### Operation instructions

1. Activation when body heat passes through the detection zones. (See diagram 1).
  2. Re activation will return to pre-set time delay.
  3. If there is no detection within the pre-set time, the unit will repeatedly flash during the last minute of count down before switching off.
- 
1. Where larger areas are to be covered, please use additional PIRs connecting the live in terminals, live out terminals and neutral terminals.

Diagram 1


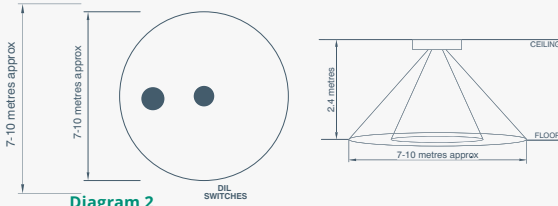


Diagram 2

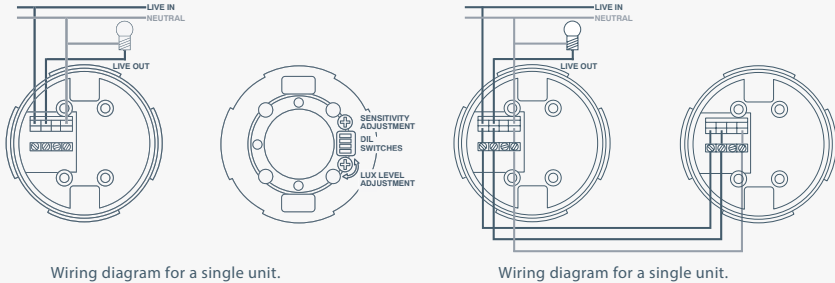

Wiring diagram for a single unit.

Wiring diagram for a single unit.



Diagram 3

**Please note:** The black bar denotes the position of the dip switch. Dip switch 4 is only used for Setting Automatic (150 Lux) or Manual Lux ONLY.

Diagram 4

Time Settings (Test Mode to 60 mins).

## Positioning

Use the detection range to determine a suitable location for the sensor. When locating the position of the unit, ensure the sensor is not subjected to bright sunlight. Ensure that the sensor is not adjacent to the load. Do not site the unit on a vibrating surface or near forced air heating and ventilation (see diagram 1).

## Important Notice

All wiring should be carried out by a competent person or a qualified electrician and should be fitted to current IEE wiring regulations BS 7671. The circuit should be isolated before carrying out any work. Failure to adhere to the instructions will invalidate the warranty.

## PIR Pre-wired Colours.

**Live In:** Brown, **Switch Live/Live Out:** Black, **Neutral:** Grey. **Earth:** Green and Yellow. Earth is not connected into the PIR as no earth is required in the PIR. Earth must be connected into the system at the other end to protect cables and circuits. When connecting additional devices together only utilise Live In, Live Out /Switch Live and Neutral connections.

## Technical Helpline

For further help or assistance or information on this or other products in the range please call the Elkay Technical team on +44 (0)28 9061 6505. Please call the Technical helpline before returning any products to your stockist. These instructions are available in other languages. Please refer to our website [www.elkay.co.uk](http://www.elkay.co.uk) Instrukcje są również dostępne w innych językach. Prosimy o zapoznanie się z naszą stroną internetową [elkay.co.uk](http://elkay.co.uk) lub [elkaypolska.pl](http://elkaypolska.pl)

Brook House,  
Dunmurry Industrial Estate,  
Dunmurry, Belfast BT17 9HU

T +44 (0)28 9061 6505  
F +44 (0)28 9061 6518  
E [info@elkay.co.uk](mailto:info@elkay.co.uk)

Elkay (Europe)  
51C Milicka, Trzebnica, 55 100  
Poland



[elkay.co.uk](http://elkay.co.uk)

