

## 350A-1 Push Button Timer – Two wire

The 350A-1 Push Button Timer is part of the Elkay family of switches, timers and detectors which save energy and increase convenience in and around your home or business premises.



### Product description

The 350A-1 Push Button 2 wire time delay switch is a well-designed, aesthetically pleasing, and reliable electronic time delay switch for switching a variety of lighting loads providing automatic time controls. This Elkay Timer is an energy saving device to switch lighting loads ON for a pre-selected time selected from 8 available time settings ranging from 2 minutes to 2 hours. A 24/7 uninterrupted mains supply is required. This 350A-1 Push Button timer provide energy saving functionality by timing lighting off to avoid unnecessary power usage. No neutral required.

### Typical Product usage

The 350A-1 Push Button timer is commonly used to control all types of lighting loads. Applications for suitable use include lighting such as LED lighting, fluorescent and compact fluorescent lighting. We do not recommend this in bedrooms or sleeping areas as the blue LED can be very bright. Instead use the 350B-1 Elkay 2 wire Push button without an LED locator ring in those areas. For more details of where this product can be used, please contact Elkay Technical.

It fits easily into a British Standard back box of 25mm depth. The 350A-1 Push Button timer must be used with activator switches for multi-way switching.

### Key features

- 16A any load type
- 2 wire (Live and Switch live)
- No Neutral required
- Blue Locator ring
- Re-set timing sequence at any time during countdown
- Cancellation function with manual override OFF capability after 1 minute.
- One minute countdown LED indicator
- Can be interlinked with Activator for multi-way switching \*\*.
- 8 Timer settings from 2 mins to 2 hours

## Technical Specification


- **Voltage:** 240V a.c.
- **Frequency:** 50/60Hz
- **Operating Temperature:** -10 to 45 °C
- **Timing:** 2 minutes to 2 hours
- **Connections:** Live | Switch Live |
- **Loading:** Up to 16A lighting load\*
- **Marking:** CE & UKCA
- **Terminal Capacity:** 2.5mm<sup>2</sup>
- **Standards:** BS EN 60669, 60669-1, 60669-2-1, 60669-2-3.
- **Power Consumption:** 0.65W
- **Material:** Flame Retardant ABS / UV Resistant
- **Compliances:** RoHS compliant, WEEE Policy, ISO9001, ISO14001.
- **Total Product Weight (each):** 157g
- **Total Plastic Weight (each):** 60g

\*All lighting load type switching means that all load types such as LED, Fluorescent, Compact fluorescent and Resistive can be switched at 16Amps (3680W) without the need to derate.

\*\*Available Indoor Activator switches for this model is the 350A-3 Push Activator. Please note a 3-core connection is required between Master and Activator. Only on this product is it possible to link the Master and Activator with two wires but there will be no LED at the activators. For further details contact Elkay technical.

## Dimensions –

Front View

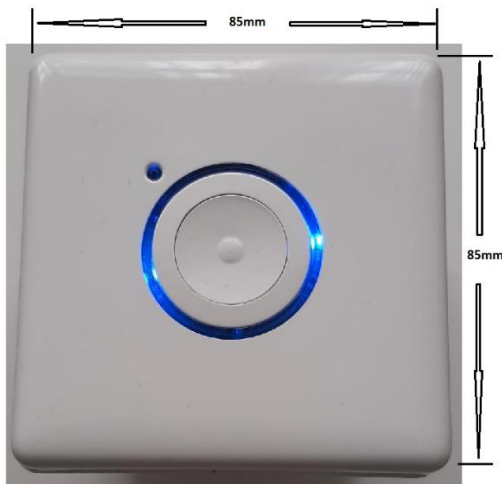

Side View



### Amendments Record

Action	Date
Draft Issue	15/06/2021