


TIMERS & SWITCHES

Illuminated pushbutton timer

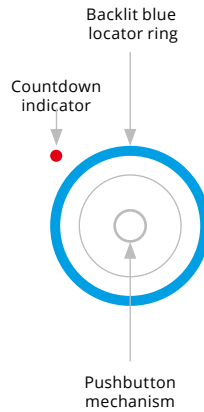

Description

The Pushbutton Timer is suitable for retrofit into modern lighting systems. Able to replace existing single gang switches, to provide energy saving functionality by turning off the power source via timer, to avoid unnecessary power usage.

The Pushbutton Timer must be used in conjunction activator devices for multi-way applications. This has the ability to latch back on to the mains power supply and reset in the event of a power cut.

A Capacitor must be used in the circuit when switching low wattage loads such as fluorescent, compact fluorescent, and LED's.

Part No.	Type	Configuration	Finish	Rating
350A-1***	Illuminated pushbutton timer master	2 Wire* for lighting only	White	16A-240V
3875A-1***	Illuminated pushbutton timer master	3 Wire	White	16A-240V
350A-3	Illuminated pushbutton timer activator	3 Core**	White	16A-240V

*PFCC-1 Capacitor will often be required when switching certain types of load - see page 27 for full details or contact Elkay Technical.

Activators must be used with illuminated range and connected with 3 Core cables to Master unit. *Activator unit required for multiway switching. See Technical pages 48-56 for wiring diagrams.

Key features:

- 16A any load type (requires Capacitor PFCC-1 for all types of low wattage loads and LED lighting)
- 2 wire (Live and Switch live required) 24 hour uninterrupted supply required
- Blue Locator ring
- Re-set timing sequence at any time during countdown
- Can be interlinked with any Elkay activator switches (Only one Master per circuit)
- Fits into 25mm depth back boxes
- Time settings from 2 mins to 2 hours
- Last minute indicator
- No Neutral required