


OUTDOOR TIMERS & SWITCHES

Outdoor PIR timer

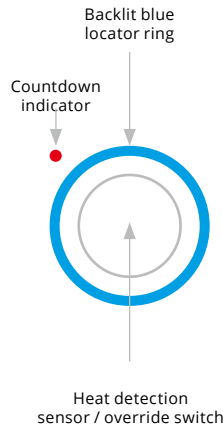


Description

The Outdoor Illuminated PIR Timer is a fully automatic device which controls various power loads through the detection of body heat. Activated by the detection of moving body heat, the lighting or power load will then stay on for a preset period of time. If body heat is no longer detected, the time period will elapse and the load will be switched off.


An internal light sensor will keep the lighting switched off when sufficient ambient light is available, further increasing the energy saving potential of the PIR Timer.

Part No.	Type	Configuration	Finish	Rating
570A-1	Outdoor PIR timer master	3 Wire*	White	16A-240V

See Technical pages 48-56 for wiring diagrams.



Plan view



Side view

Typical applications:

- Commonly used for lighting where there is a neutral, to control all load types such as fluorescent, resistive and LED loads
- 3 wire (Live, switch live and neutral required)

Key features:

- 16A any load type
- Blue Locator ring
- Manual override of the Lux Level setting
- Override OFF capability
- 360o detection utilising an elliptical beam
- 5 - 7 m detection range
- Time settings from 2 mins to 2 hours
- Timings start from last detection